



## 5 mm Premium glue down/ loose lay vinyl plank

### PRODUCT CHARACTERISTICS

---

Size: 7" W x 48" H (177.8 mm W x 1219.2 mm H)

Thickness: 0.2" (5 mm)

Wear Layer: 20 mil (0.5 mm)

Finish: Medium wood grain embossing

Edges: Beveled

### CARTON

---

Covers Area: 23.36 ft<sup>2</sup> (2.17 m<sup>2</sup>)

Pieces per Carton: 10

Gross Weight: 40.57 lb (18.4 kg)

### PRESENCE OF KEY CHEMICALS

---

Phthalates: KS M 1991:2015 – < 0.01% (MDL: 0.01%)

### ACOUSTICS

---

IIC: ASTM E492-09(2016)/ASTM E989-06(2012) – IIC 66

STC: ASTM E90-09/ASTM E413-16 – STC 67

### REACTION TO FIRE

---

Critical Radiant Flux: ASTM E648 – 1.08 W/cm<sup>2</sup> (Class 1)

Surface Burning Characteristics: ASTM E84-17 – 50 FSI (Flame-spread Index), 750 SDI (Smoke-developed Index)

### OTHER PERFORMANCE

---

Static Load Limit: ASTM F 970 ≤ 0.005 in. 250 psi.


Slip Resistance: EN 13893 (2003) –

Dynamic coefficient of friction (production direction): 0.41;

Dynamic coefficient of friction (non-production direction): 0.56

### COMPOSITION

---

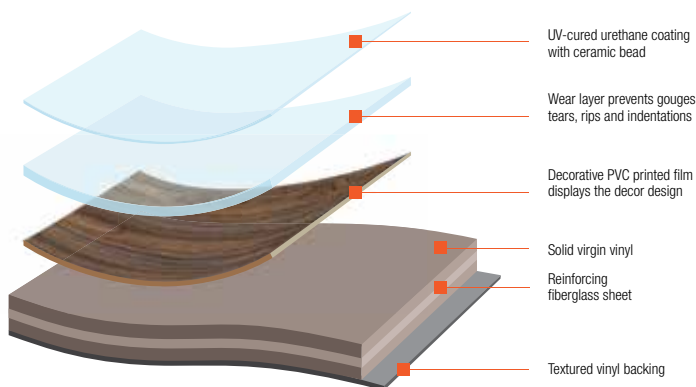

### INSTALLATION

---

Premium glue down/loose lay

### WARRANTY

---

Residential: Limited Lifetime

Commercial: Limited 20 Year